



- Product Description


- Direct communication between PC and DALI system by USB interface.
- DALI drivers, sensors and multi-function panel can be easily addressed and parameter configured by the system configuration software.
- Can be set to have DALI bus power function at the same time, it can supply maximum supply current less than 18mA




- Technical parameters

Power Supply	By USB/5V external power supply	Standard IEC 62386-101(DALI 协议标准) IEC 62386-102(DALI 协议标准) EN 60598-1(Glow-wire test) IEC 60929(DALI V0) IEC 62386(DALI V1)
Input Current	6mA	
Output Current	18mA	
Output	DALI	
Operating Temperature	-10°C ~ +50°C	


- Wiring Instruction

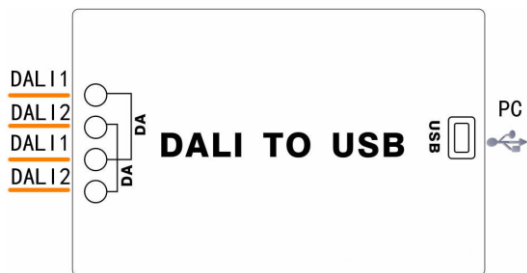

Wiring Preparation



- Size

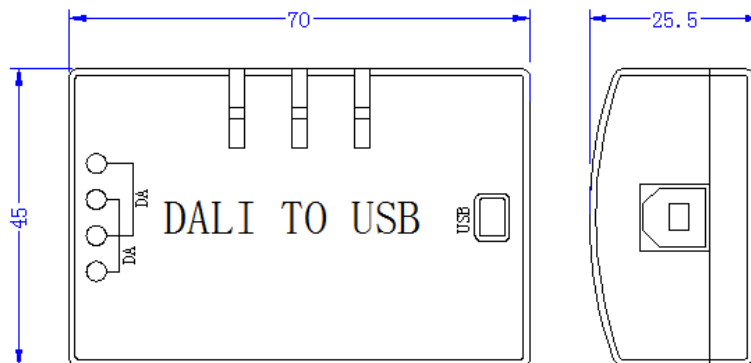

- Installation and Connection Example

